



BISTAR

TP7F66M
TP7F66M(H) **132-cell**

485 - 505W

10BB PERC



体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



质量保证

12

25

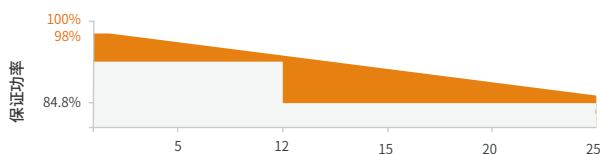

产品特性



10BB半片电池技术

2%

0.55%



显著降低热斑风险



更一度电成本

2%



优秀的抗PID性能

PID
85 / 85% RH 192





IP68接线盒

| | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT |
|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 485 | 362 | 490 | 365 | 495 | 369 | 500 | 372 | 505 | 376 |
| | 37.87 | 35.3 | 38.02 | 35.5 | 38.17 | 35.6 | 38.32 | 35.7 | 38.47 | 35.9 |
| | 12.81 | 10.23 | 12.89 | 10.29 | 12.97 | 10.36 | 13.05 | 10.42 | 13.13 | 10.49 |
| | 45.16 | 42.5 | 45.31 | 42.6 | 45.46 | 42.8 | 45.61 | 42.9 | 45.76 | 43.1 |
| | 13.70 | 11.04 | 13.78 | 11.11 | 13.86 | 11.17 | 13.94 | 11.24 | 14.02 | 11.30 |
| | 20.40 | | 20.60 | | 20.80 | | 21.10 | | 21.30 | |

| | |
|--|--|
| | 10BB |
| | 132 (6*22) |
| | 2094*1134*35mm (82.44*44.65*1.38) |
| | 26.6kg (58.6lbs.) |
| | 3.2mm |
| | |
| | IP68, 3 |
| | 4mm ² (IEC), 12AWG(UL) 300mm |
| | T01/LJQ-3-CSY/MC4/MC4-EVO2 |

| | |
|--|----------------|
| | 1000V/1500V/DC |
| | -40°C~+85°C |
| | 25A |
| | Class |
| | |
| | |

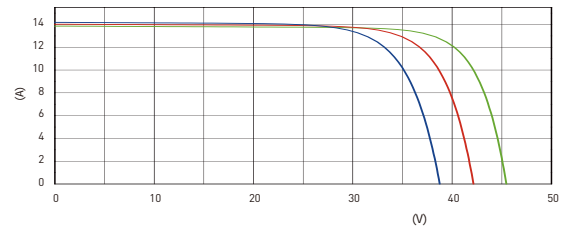

| | | |
|--|-----|---------|
| | 31 | 31(USA) |
| | 682 | 682 |

