




BIPRO

FD6172M **144-cell**

435 - 455l

9BB


PERC

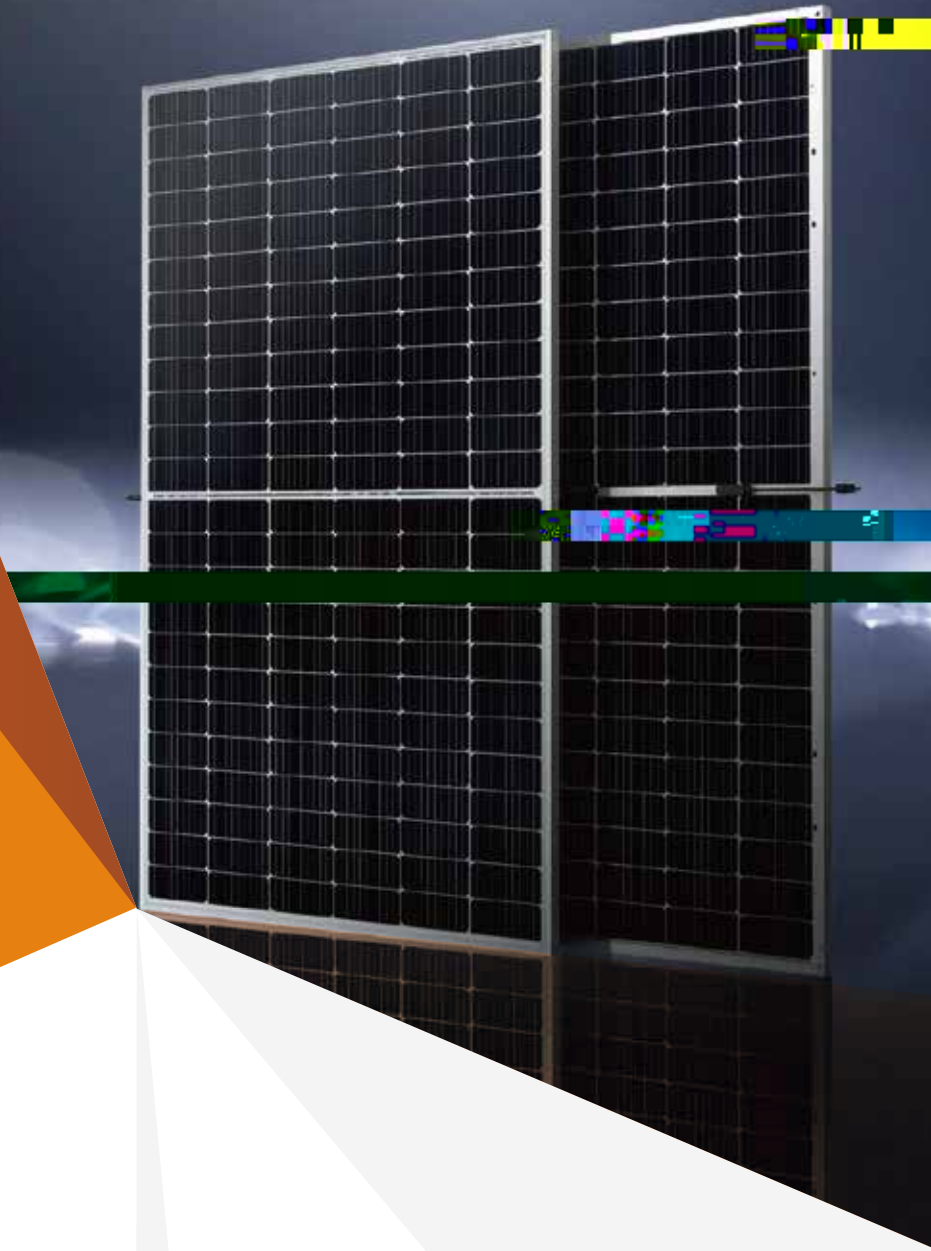

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



12 30

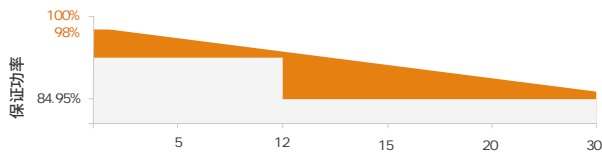

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	435	323								
	41.4	38.7								
	10.51	8.36								
	49.8	44.6	11.16	11.16	11.16	11.16	11.16	11.16	11.16	11.16
	11.16	9.0	41.4							
	20.00	19.81	11.664	220.20		20.50		20.70		20.90

11. 1 11. ° 41. 4. 8


	5%	10%	15%	20%	25%
	462	484	506	528	550
	41.6	41.6	41.6	41.6	41.6
	11.11	11.64	12.17	12.70	13.23
	50.0	50.0	50.0	50.2	50.2
	11.78	12.34	12.90	13.46	14.03

	9BB
	144 (6*24)
	2094*1038*30_ (82.44*40.87*1.18)
	28.0] Y (61.73Te)
	2.0_ _
	2.0_ _
	IP68 3
	4_ _ , (IEC), 12AI G(GL) 300_ _
	F01/LJQ-3-CEK/MC4/MC4-EH02 (t)

3

1

12
10
8
6
4
2
0



36 36(USA)
792 648