



# FEATHER

TP7F54M  
TP7F54M(H) **108-cell**

**390 - 410W**

10BB PERC




## 体系及产品认证

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



## 质量保证

12 25

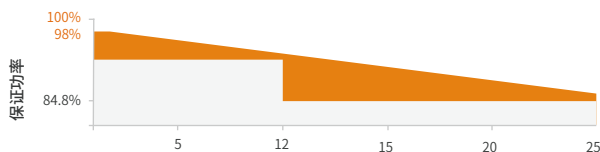

## 产品特性



重量更轻



10BB半片电池技术

2%

0.55%



显著降低热斑风险



优秀的抗PID性能

PID  
85 / 85% RH 192





IP68接线盒

|  | STC   | NMOT  | STC   | NMOT  | STC   | NMOT  | STC   | NMOT  | STC   | NMOT  |
|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|  | 390   | 291   | 395   | 294   | 400   | 298   | 405   | 302   | 410   | 306   |
|  | 30.65 | 28.6  | 30.85 | 28.8  | 31.05 | 29.0  | 31.24 | 29.2  | 31.43 | 29.3  |
|  | 12.73 | 10.18 | 12.81 | 10.23 | 12.89 | 10.30 | 12.97 | 10.36 | 13.05 | 10.42 |
|  | 36.50 | 34.4  | 36.75 | 34.6  | 37.00 | 34.8  | 37.25 | 35.1  | 37.50 | 35.3  |
|  | 13.61 | 10.97 | 13.69 | 11.04 | 13.78 | 11.11 | 13.86 | 11.17 | 13.94 | 11.24 |
|  | 20.00 |       | 20.20 |       | 20.50 |       | 20.70 |       | 21.00 |       |

|  |   |
|--|---|
|  | 10BB  |
|  | 108 (6*18)                                  |
|  | 1722*1134*30mm<br>(67.80*44.65*1.18 )       |
|  | 16.2kg (35.72lbs.)                          |
|  | 2.0mm                                       |
|  |   |
|  | IP68, 3 Bypass Diodes                       |
|  | 4mm <sup>2</sup> (IEC), 12AWG (UL)<br>300mm |
|  | T01/LJQ-3-CSY/MC4/MC4-EVO2                  |

|  |                |
|--|----------------|
|  | 1000V/1500V/DC |
|  | -40°C~+85°C    |
|  | 25A            |
|  | Class          |
|  |                |
|  |                |

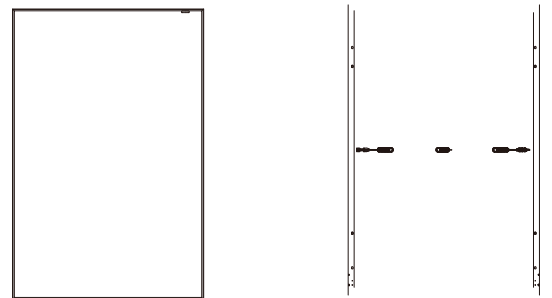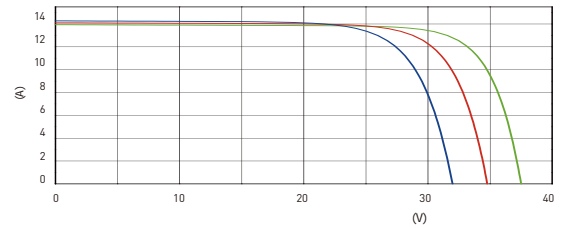

|  |     |         |
|--|-----|---------|
|  | 36  | 36(USA) |
|  | 936 | 936     |

