



# BISTAR

TP6L60M  
TP6L60M(H) **120-cell**

**350 - 370W**

9BB Half-cut Mono Perc  
Full Black




## SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems



## PERFORMANCE WARRANTY

Linear Performance Warranty

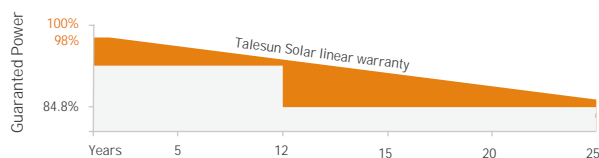

## KEY FEATURES



### 9BB Half-cut Cell Technology

New circuit design, lower internal current, lower Rs loss  
Ga doped wafer, attenuation <2% (1st year) / ≤0.55% (Linear)



### Significantly Lower the Risk of Hot Spot

Special circuit design with much lower hot spot temperature



### Excellent Anti-PID Performance

2 times of industry standard Anti-PID test



### Wider Application

No water-permeability and high wear-resis  
can be widely used in high-humid, windy ar



### IP68 Junction Box

High waterproof level

## ELECTRICAL CHARACTERISTICS

### MECHANICAL

### CHARACTERISTICS

### I-V CURVE

con (9Busbar)  
20  
in  
.38 in  
(2.99lbs)  
inium  
Diode  
WG(U  
a or  
ized Length  
V02

TP6L6

Voltage (V)

### APPLICATIONS

Voltage (V)

## TECHNICAL DRAWINGS

### TECHNICAL

### PACKAGING

### TECHNICAL



ThL